



TYPICAL DETAILS

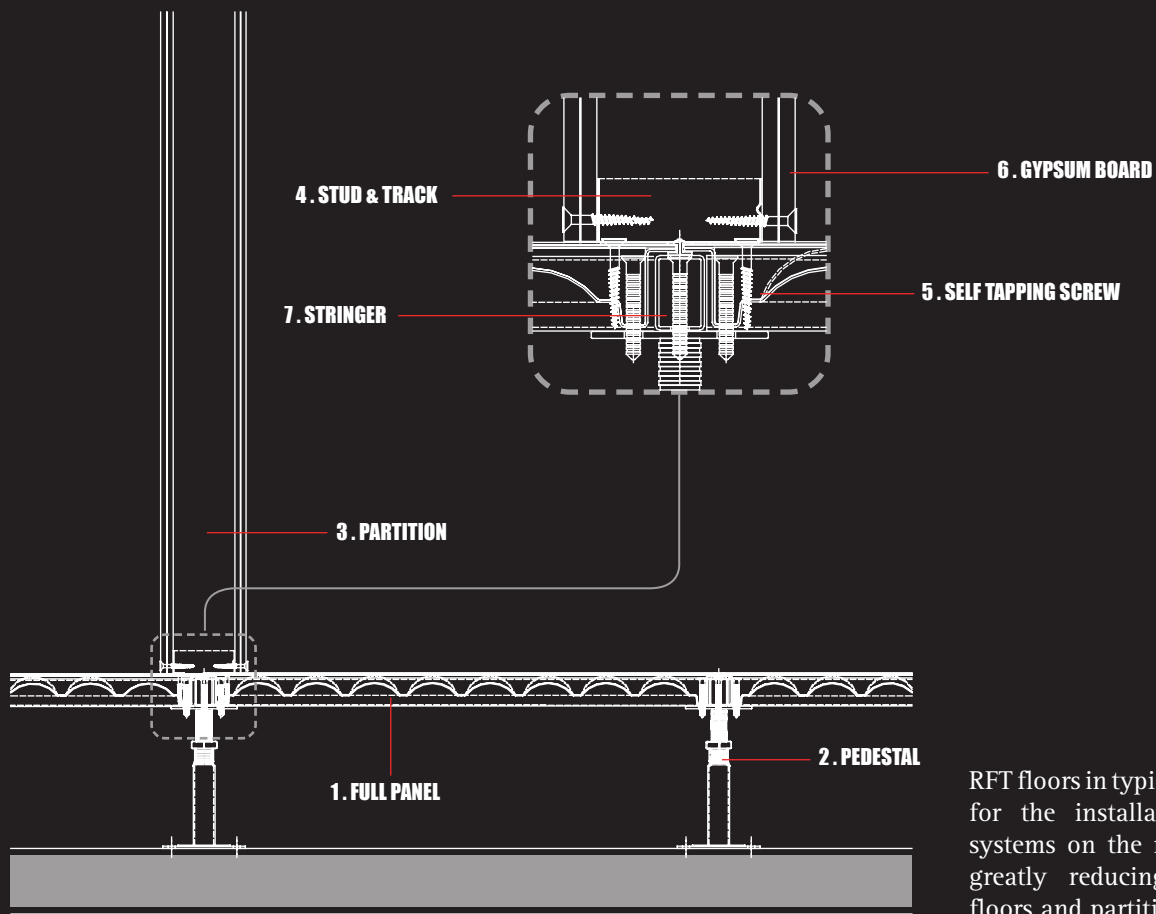

General Use

RFT floors in typical office spaces allow for the installation of partitioning systems on the raised floors directly, greatly reducing wastage in both floors and partitioning systems.

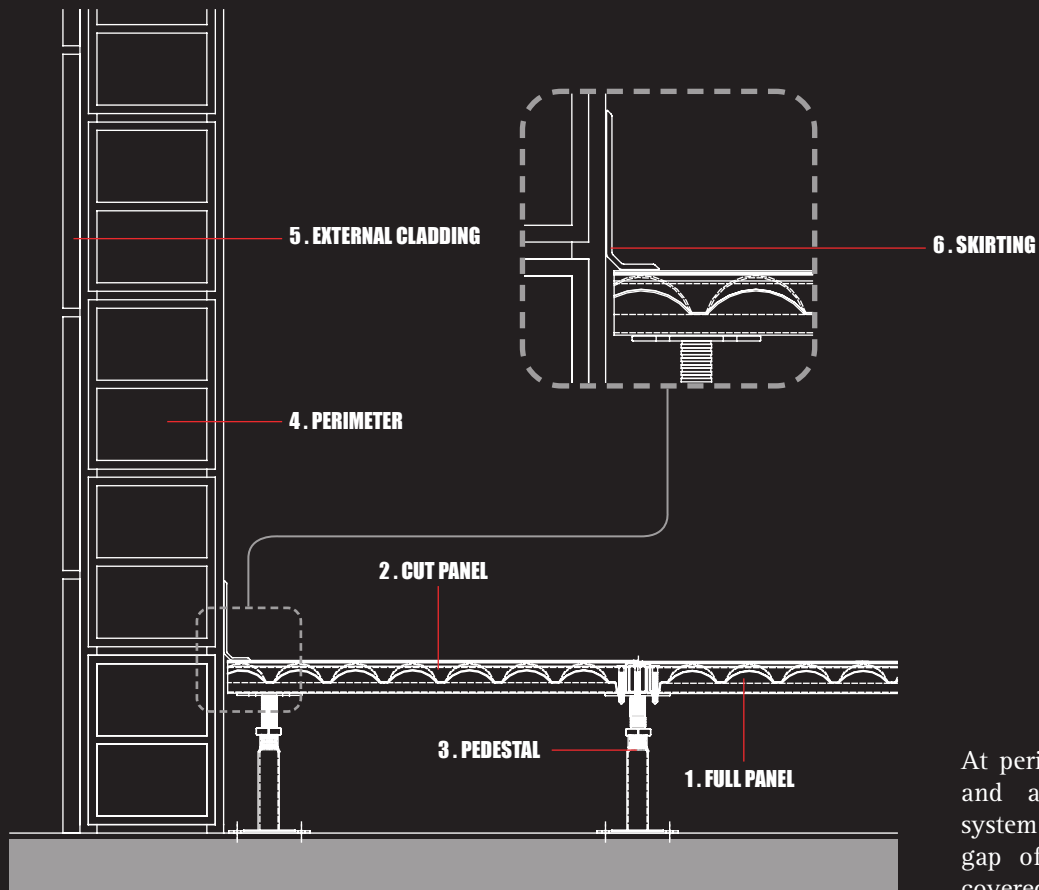


Perimeter Condition

At perimeters, panels are cut on site and are installed using standard system components. The minimum gap of 5mm left for expansion is covered by skirting (by others).

Step Detail

The construction of a sometimes necessary step is straightforward and made of readily available materials in any local market.

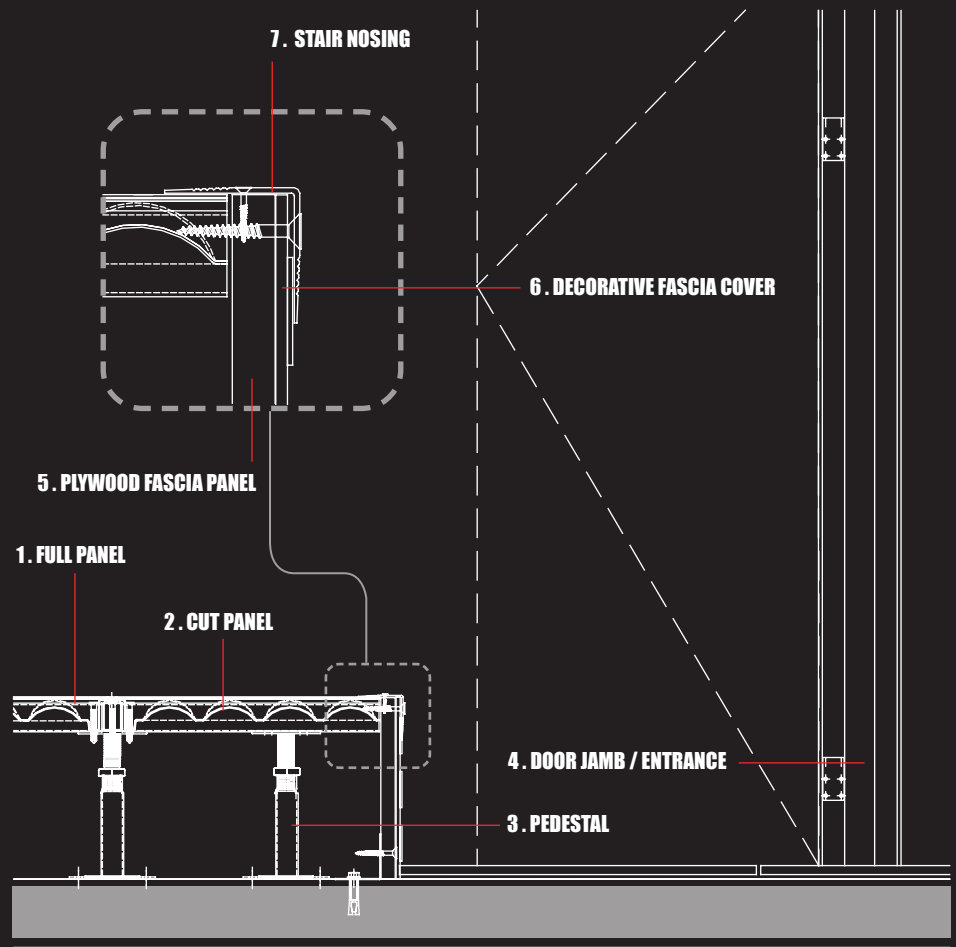

Bridging Method

Obstacles that prevent the placement of a pedestal in necessary locations are sometimes encountered. A “bridging” construction is created from standard system components.

